
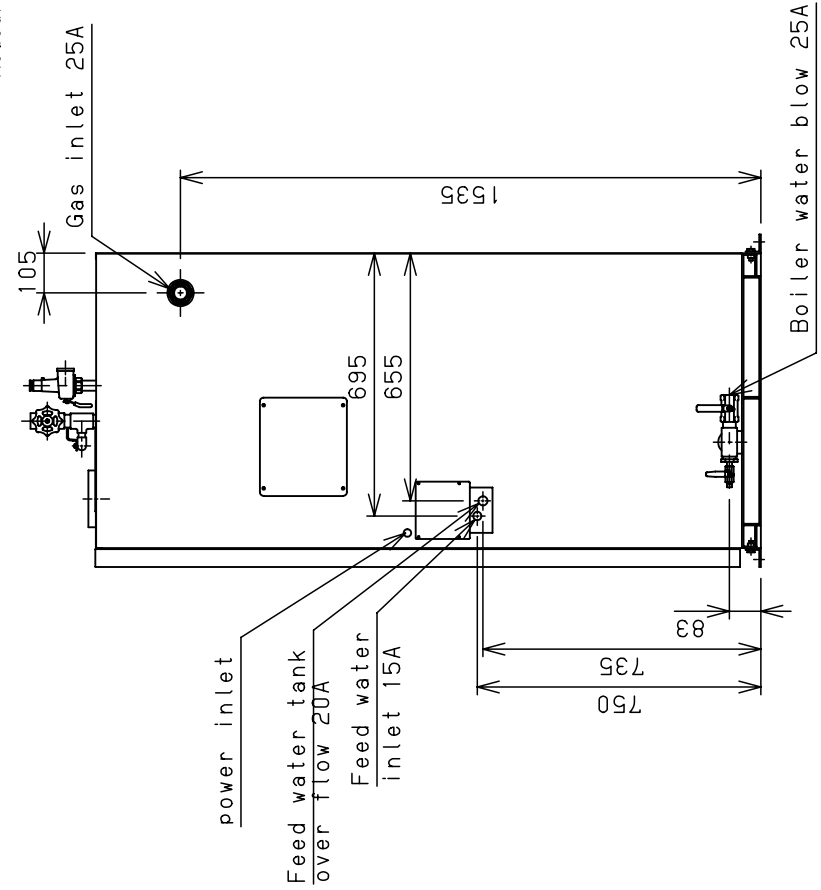


Anchor position

MODEL		Sid-250N	
Equivalent evaporation	kg/h	250	
Max. pressure	MPa	0.98	
Boiler efficiency	%	88	
Fuel type	-	13A•LPG	
Fuel consumption			
13A	LOW 40.6MJ/m ³ (N)	m ³ (N)/h	15.8
LPG (propane)	LOW 93.7MJ/m ³ (N)	m ³ (N)/h	6.8
LPG (butane)	LOW 46.4MJ/kg	kg/h	13.8
LPG	LOW 118.9MJ/m ³ (N)	m ³ (N)/h	5.4
LPG (butane)	LOW 45.7MJ/kg	kg/h	14.0
Supply gas pressure	13A LPG	kPa	2.0±0.5 2.8±0.5
Weight	kg	430	
Weight in operation	kg	480	
Available power	kW	0.85	
Type of boiler	-	Once-Through Boiler	

※Above specifications are based on the following standard values:
 Steam pressure =0.49MPa
 Feed water temp. =15℃
 Feed air temp. =35℃
 Low heating value -

※The following tolerances are accepted as unavoidable:
 Measurement error in boiler efficiency ±2%
 Measurement error in combustion(input) ±3.5%

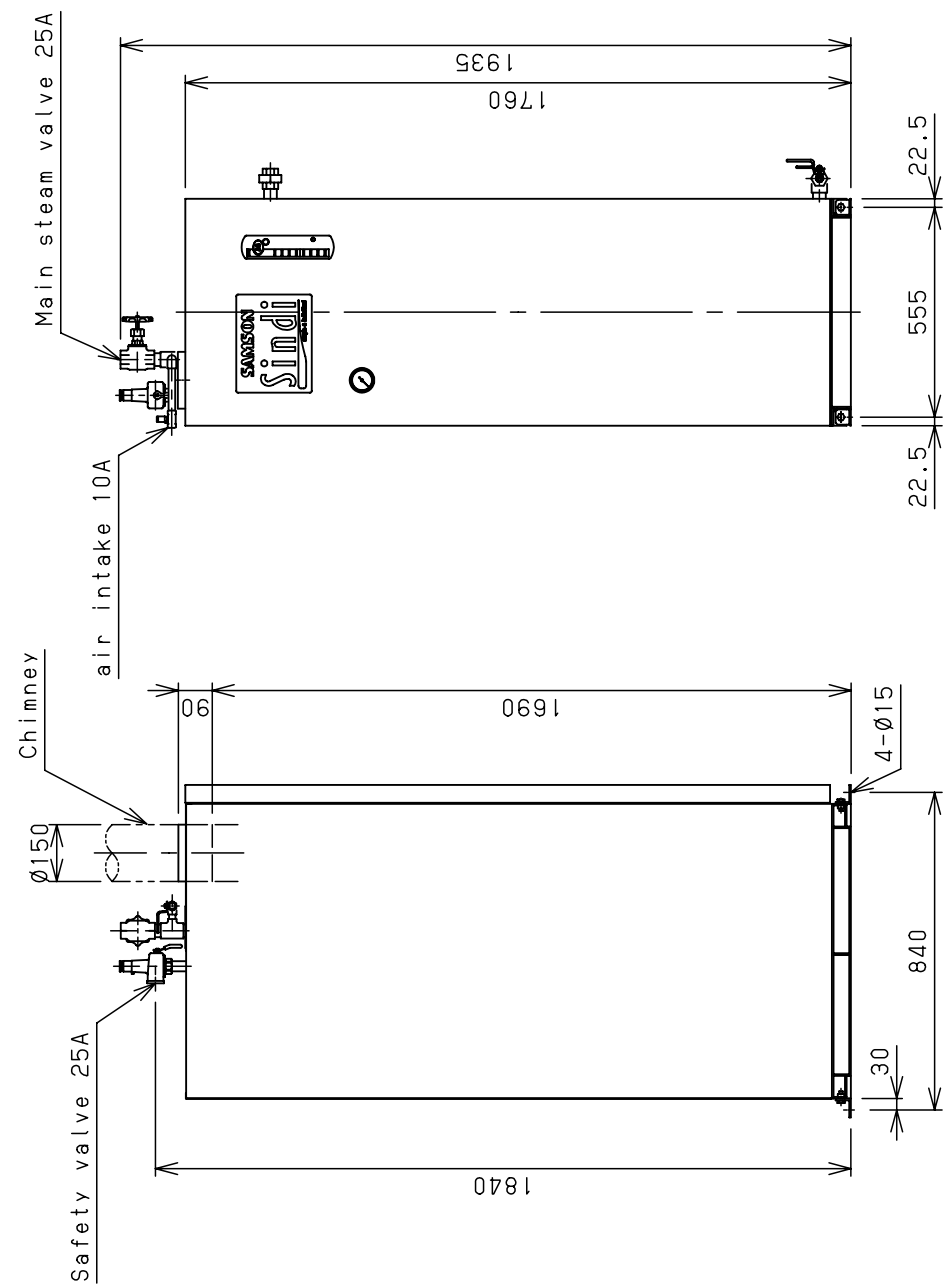

NOTE : Please install the plates of anchor bolt (provided as accessories) at your side.

APPROVED BY		CUSTOMER	
T. Kameyama		NAME	BOILER OUTLINE DIMENSIONS
T. Nishiyama		SCALE	1 / 20
		DATE	14 3 . 3
			Sid-250N
			DWG. No. SD25N-NG1 -NNN104303

REVISIONS