
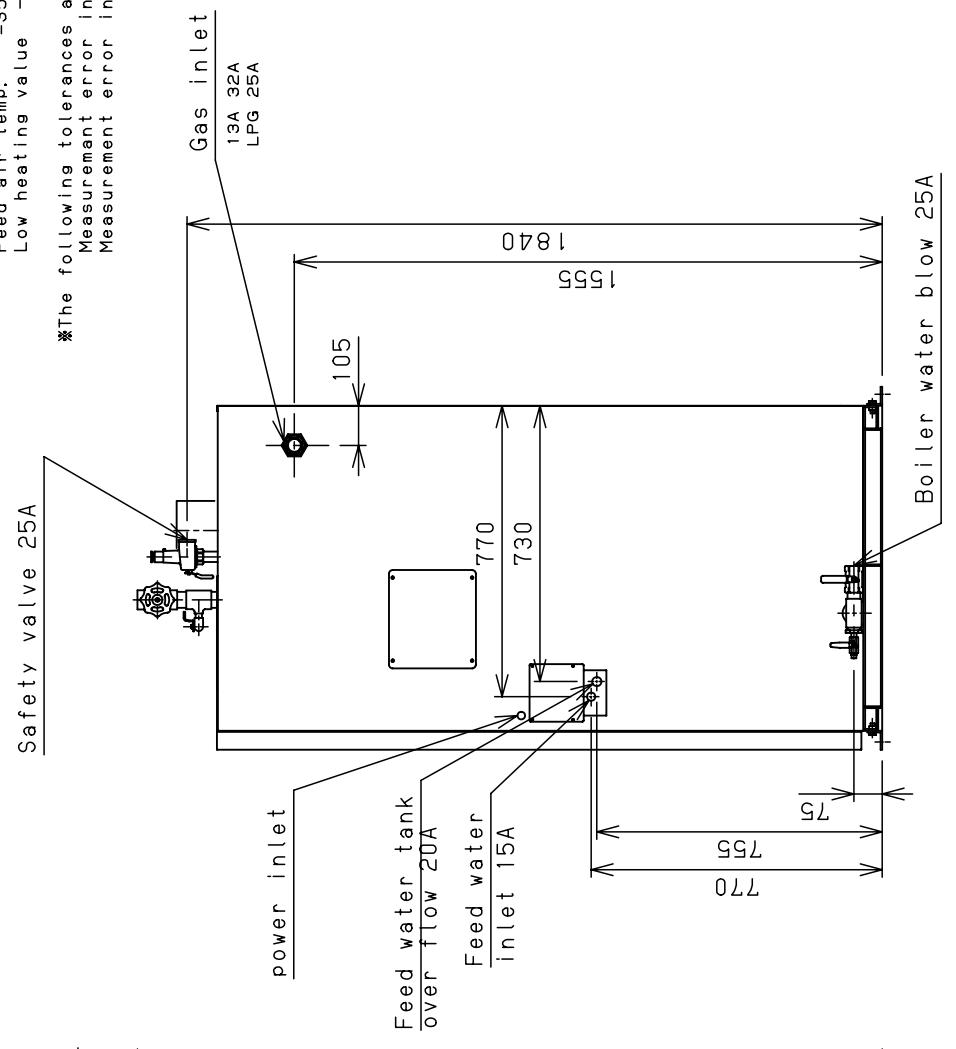


MODEL	Sid-350PN	
Equivalent evaporation	kg/h	350
Max. pressure	MPa	0.98
Boiler efficiency	%	96
Fuel type	- 13A•LPG	
Fuel consumption		
13A	LOW 40.6MJ/m ³ (N)	m ³ (N)/h 20.3
LPG (propane)	LOW 93.7MJ/m ³ (N)	m ³ (N)/h 8.8
	LOW 46.4MJ/kg	kg/h 17.7
LPG (butane)	LOW 118.9MJ/m ³ (N)	m ³ (N)/h 6.9
	LOW 45.7MJ/kg	kg/h 18.0
Supply gas pressure	13A LPG	kPa 2.0±0.5 kPa 2.8±0.5
Weight	kg	720
Weight in operation	kg	790
Available power	kW	1.2
Type of boiler	- Once-Through Boiler	

※Above specifications are based on the following standard values:
 Steam pressure =0.49MPa
 Feed water temp. =15℃
 Feed air temp. =35℃
 Low heating value -

※The following tolerances are accepted as unavoidable:
 Measurement error in boiler efficiency ±2%
 Measurement error in combustion(input) ±3.5%

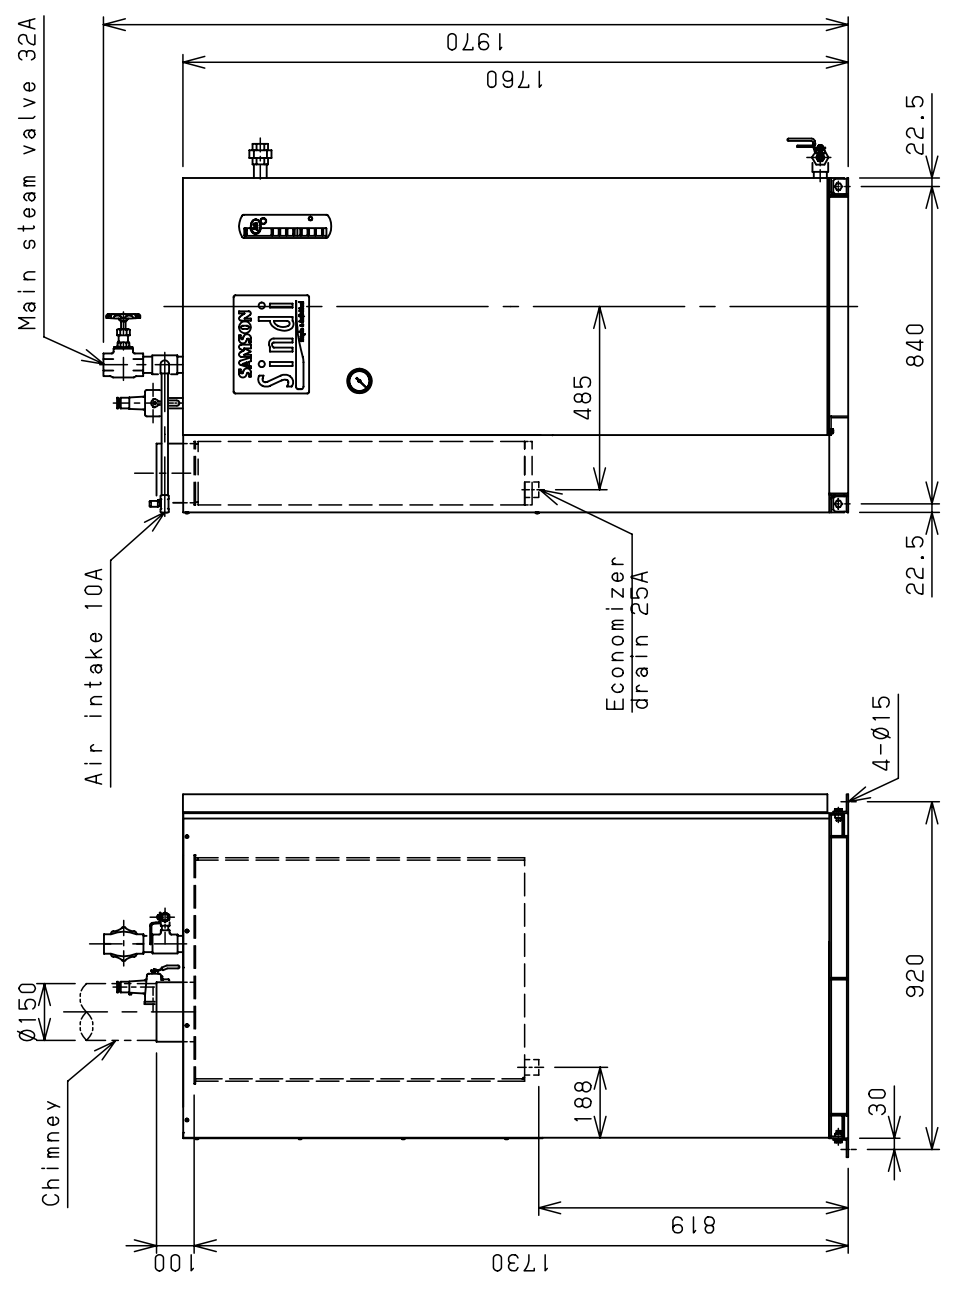

APPROVED BY	T. Kameyama
CHECKED BY	T. Nishiyama
DESIGNED BY	
DRAWN BY	K. Ohki

CUSTOMER		
NAME	BOILER OUTLINE DIMENSIONS	
SCALE	1 / 20	
DATE	14 3 . 3	
		Sid-350PN

NOTE : Please install the plates of anchor bolt (provided as accessories) at your side.

SANSIION CO., LTD.

DWG. No. SD35P-NG1 -NNN104303